

NF12-80

12V80Ah / 10hr rate**BATTERY**
Genergy

Introduction

Genergy NF (Front Terminal) series is designed for telecommunication UPS/EPS system with 12-year design life in float service. The battery is featured of high consistency, excellent performance and reliable standby service life.

Battery Features

- ☐ Compactness
- ☐ ETSI 19 inch / 23 inch integration
- ☐ Rackable standard component
- ☐ High power to volume ratio
- ☐ Modularity
- ☐ Long life
- ☐ Front connection and terminal access
- ☐ Central gassing system and hinged front covers on all models
- ☐ Fully tank formed plates
- ☐ Low impurity electrolyte
- ☐ Multi-position usage
- ☐ Spill proof / leak proof
- ☐ ABS case and cover VO upon request
- ☐ Very high purity lead

Electrical Specification

Design floating Life @ 25°C (77°F) 10 years

Nominal Capacity @ 25°C /77°F

20 hour rate 4.23A to 1.75Vpc 84 Ah

10 hour rate 8.07A to 1.75Vpc 80 Ah

Internal Resistance

(Fully charged battery @ 25°C /77°F) 5mΩ

Max. Discharge Current @ 25°C /77°F 640 A (5S)

Charge Methods: Constant voltage charge @ 25°C /77°F

Cycle Use 14.7 ~ 14.9V

Max. Current 24 A

Standby Use 13.6 - 13.8V

Operating Temperature Range -30 ~ 50°C


*Notes: battery voltage must be adjusted according to temperature.**Please refer to our recommendation.*

Self-Discharge

3% of capacity declined per month @ 25°C (77°F).

Battery Picture & Terminal Layout

Terminal Type: T14



Dimension & Weight

Length	Dimension (± 2mm)			Weight (± 2%)
	Width	Height	Total Height	
563 mm	115 mm	188 mm	188 mm	27.3 kg
22.2 inch	4.5 inch	7.4 inch	7.4 inch	60.2 lbs

Typical Applications

- ☐ Telecommunications
- ☐ Data Center
- ☐ Power Utility
- ☐ UPS & EPS

Constant Current Discharge (Amperes @ 25°C /77°F)

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1.60	212.4	162.2	141.1	120.0	101.9	91.9	84.9	77.9	71.9	66.4	61.5	32.61	23.62	19.22	15.83	8.23	4.31
1.65	202.1	154.3	135.0	115.8	99.5	89.7	82.9	76.1	70.3	65.1	60.3	31.92	23.22	18.87	15.51	8.23	4.31
1.70	189.6	144.8	127.6	110.5	96.3	86.9	80.4	74.0	68.5	63.5	59.1	31.23	22.75	18.47	15.19	8.15	4.27
1.75	177.2	135.3	120.2	105.2	93.2	84.0	77.9	71.8	66.7	62.0	57.9	30.54	22.27	18.08	14.88	8.07	4.23
1.80	163.7	125.0	112.1	99.1	89.2	80.5	74.8	69.1	64.4	60.2	56.6	29.76	21.80	17.64	14.48	7.91	4.15

Constant Power Discharge (Watts/cell @ 25°C /77°F)

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1.60	355.5	271.4	239.2	207.0	181.8	163.9	152.9	142.0	131.7	122.2	116.2	63.37	45.79	37.22	30.55	15.74	8.33
1.65	345.8	264.0	232.1	200.3	175.5	158.1	147.7	137.2	127.5	118.5	113.0	61.53	45.39	36.90	30.31	15.62	8.26
1.70	333.1	254.3	223.6	192.9	169.2	152.4	142.7	132.9	123.8	115.5	110.6	60.15	45.00	36.59	30.07	15.49	8.20
1.75	319.5	243.9	214.5	185.2	162.8	146.6	137.4	128.1	119.6	111.8	107.5	58.31	44.52	36.23	29.84	15.36	8.13
1.80	303.9	232.0	204.0	175.9	154.9	139.5	131.0	122.6	114.9	107.8	104.3	56.47	44.13	35.91	29.60	15.24	8.06









Subject to revision without notice. Please contact our sales representatives for latest version.

Web: www.genergybattery.com | Email: sales@genergybattery.com

NF12-80

12V80Ah / 10hr rate**BATTERY**
Genergy

Graphs

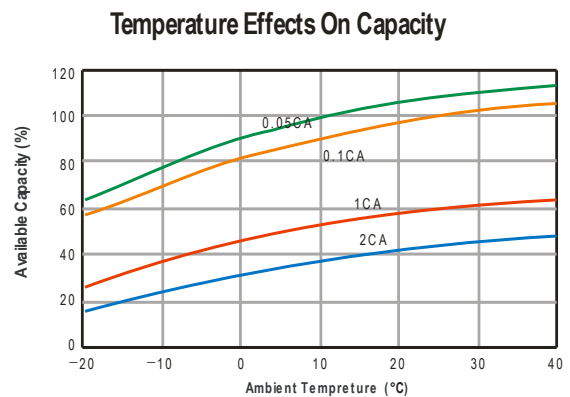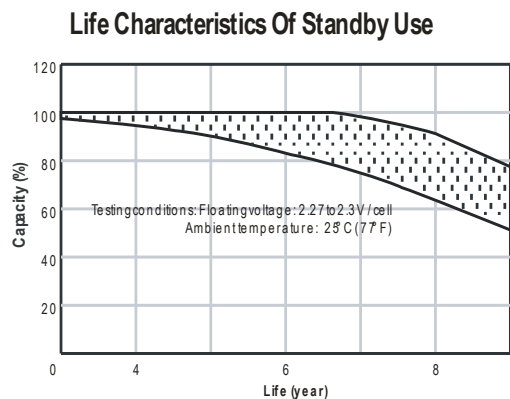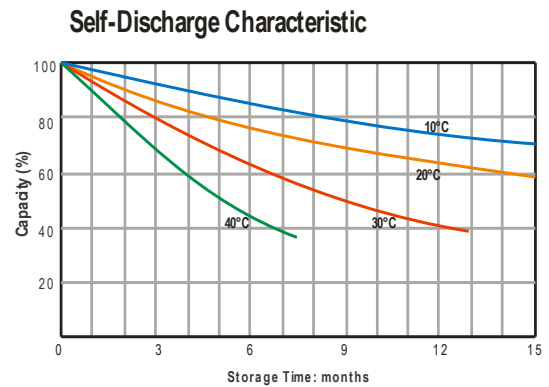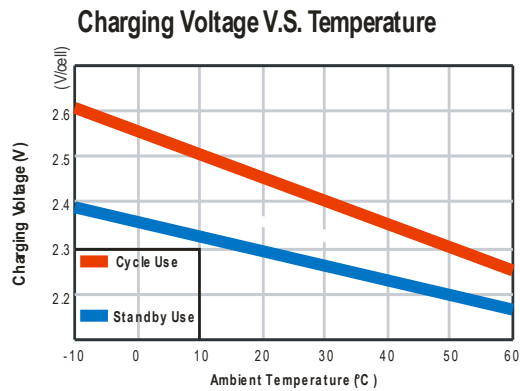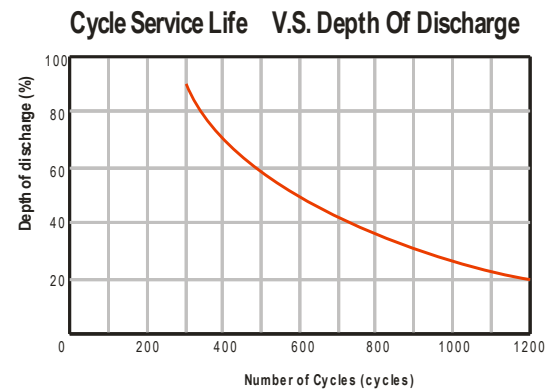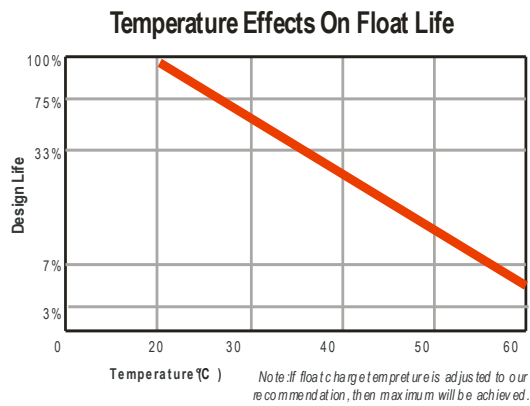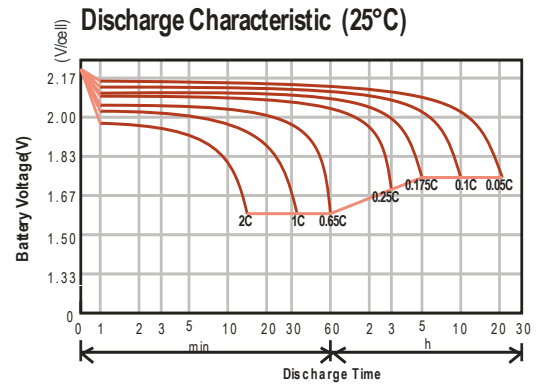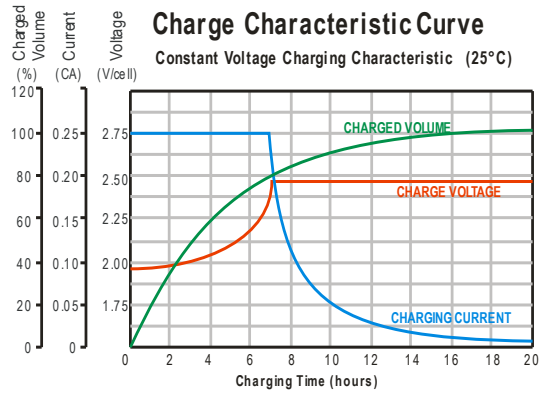

Subject to revision without notice. Please contact our sales representatives for latest version.

Web: www.genergybattery.com | Email: sales@genergybattery.com