

NM12-65S

12V65Ah / 10hr rate**BATTERY**
Genergy

Introduction

Genergy NM (33Ah-250Ah) series is designed for standby use with 10-year design life in float service. The series battery is featured of high consistency, excellent performance and reliable standby service life. It is widely applied in float service, UPS/EPS, medical equipment, telecom, photovoltaic, control system and security system.

Battery Features

- Increase durability and deep cycle ability for heavy demand applications
- Low self-discharge
- Fully tank formed plates
- Low impurity electrolyte
- Spill proof / leak proof
- Multi-position usage
- ABS case and cover VO upon request
- Very high purity lead

Electrical Specification

Design floating Life @ 20°C (68°F)	10 years
Nominal Capacity @ 25°C / 77°F	
20 hour rate 3.36A to 1.75Vpc	67.2 Ah
10 hour rate 6.56A to 1.75Vpc	65.6 Ah

Internal Resistance

(Fully charged battery @ 25°C / 77°F) 6mΩ

Max. Discharge Current @ 25°C / 77°F 650 A (5S)

Charge Methods: Constant voltage charge @ 25°C / 77°F

Cycle Use 14.7 ~ 14.9V

Max. Current 17 A

Standby Use 13.6 - 13.8V

Operating Temperature Range -30 ~ 50°C


Notes: battery voltage must be adjusted according to temperature.

Please refer to our recommendation.

Self-Discharge

3% of capacity declined per month @ 25°C (77°F).

Battery Picture & Terminal Layout

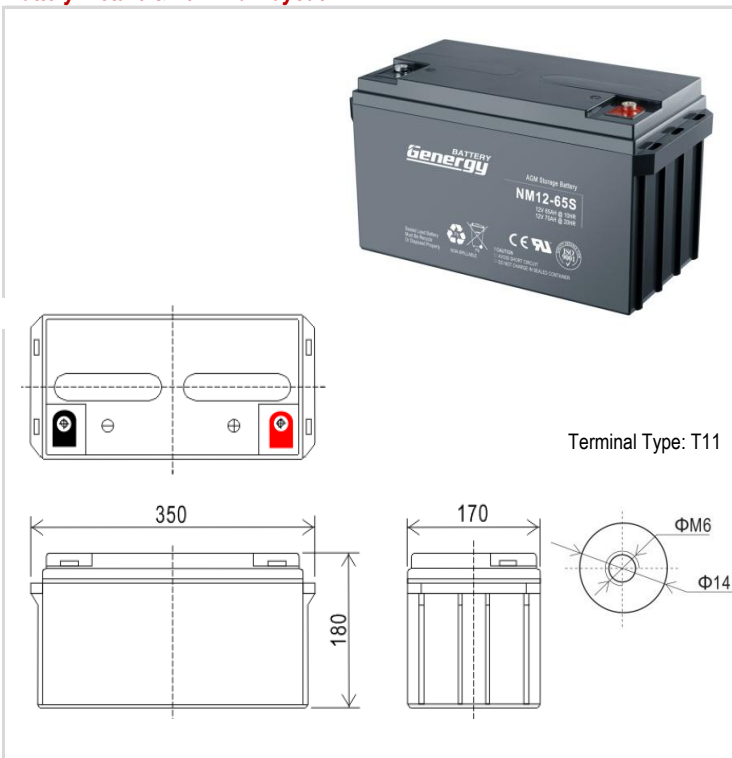

Dimension & Weight

Length	Dimension (± 2mm)			Weight (± 2%)
	Width	Height	Total Height	
350 mm	170 mm	180 mm	180 mm	19.9 kg
13.8 inch	6.7 inch	7.1 inch	7.1 inch	43.9 lbs

Typical Applications

- Telecommunications
- Power Utility
- Data Center
- UPS & EPS

Certificates



Constant Current Discharge (Amperes @ 25°C / 77°F)

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1.60	156.80	119.70	103.40	87.11	73.73	66.34	61.86	57.38	53.66	50.43	48.05	26.05	18.53	15.39	12.59	6.72	3.40
1.65	148.89	113.66	98.72	83.78	71.75	64.58	60.33	56.07	52.56	49.55	47.39	25.54	18.18	15.07	12.29	6.69	3.40
1.70	142.75	108.97	94.82	80.68	69.45	62.45	58.36	54.27	50.93	48.08	46.09	24.68	17.76	14.72	12.00	6.63	3.40
1.75	136.16	103.94	90.59	77.25	66.81	60.09	56.27	52.46	49.40	46.83	45.11	24.00	17.37	14.39	11.75	6.56	3.36
1.80	129.13	98.57	86.14	73.70	64.18	57.67	54.08	50.49	47.65	45.31	43.80	23.14	16.95	14.04	11.46	6.39	3.33

Constant Power Discharge (Watts/cell @ 25°C / 77°F)

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1.60	272.31	207.87	182.94	158.00	137.73	124.24	115.41	106.58	99.08	92.75	87.59	48.15	35.04	29.08	23.94	13.42	7.08
1.65	262.65	200.50	176.81	153.13	134.11	120.95	112.45	103.95	96.79	90.79	85.96	47.17	34.72	28.75	23.62	13.29	7.08
1.70	252.55	192.79	170.25	147.71	129.83	117.11	109.05	101.00	94.27	88.72	84.33	46.04	34.07	28.25	23.27	13.03	6.98
1.75	241.57	184.40	163.12	141.84	125.22	112.94	105.33	97.72	91.44	86.32	82.37	44.57	33.10	27.56	22.85	12.93	6.86
1.80	229.71	175.35	155.44	135.53	120.28	108.44	101.27	94.11	88.27	83.60	80.09	43.00	32.23	26.86	22.33	12.80	6.79

Subject to revision without notice. Please contact our sales representatives for latest version.

Web: www.genergybattery.com | Email: sales@genergybattery.com









Version NO.20181030

Page 1 of 2

NM12-65S

12V65Ah / 10hr rate**BATTERY**
Genergy

Graphs

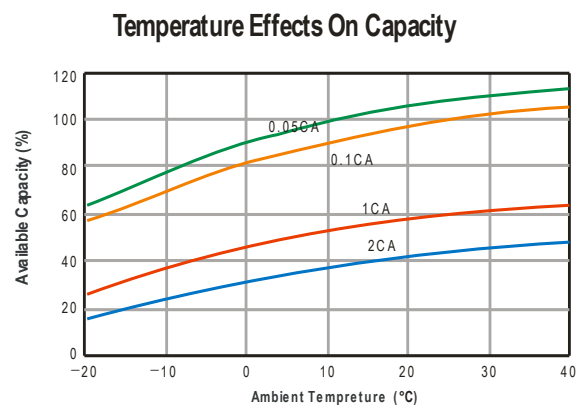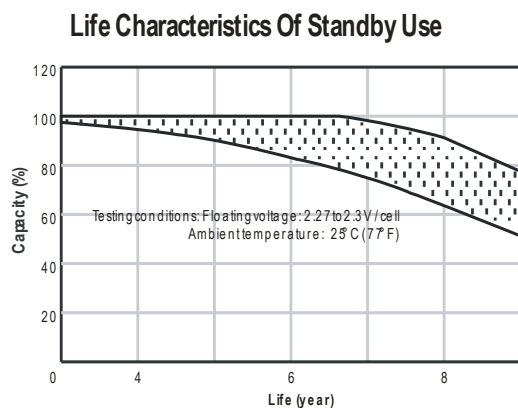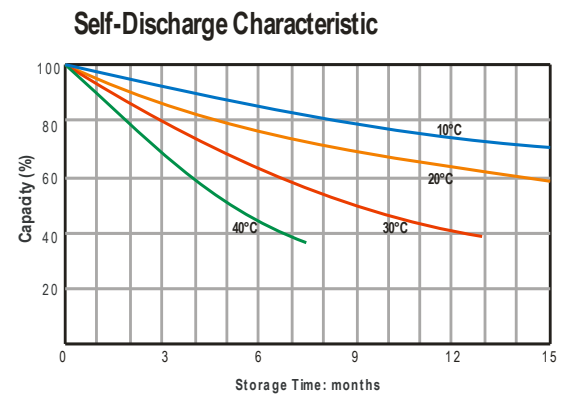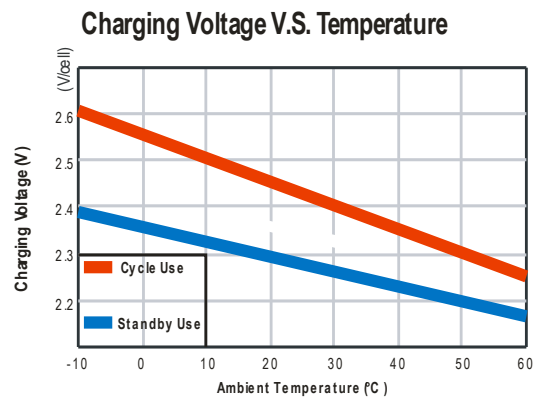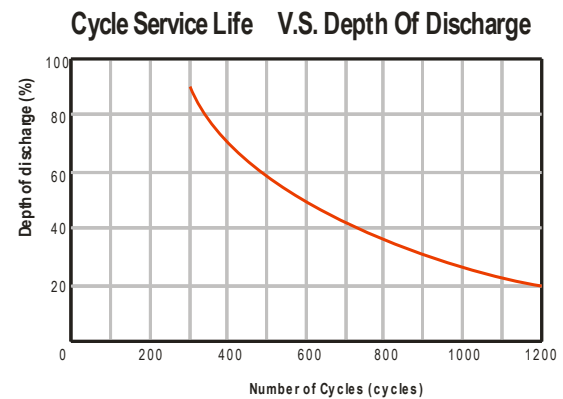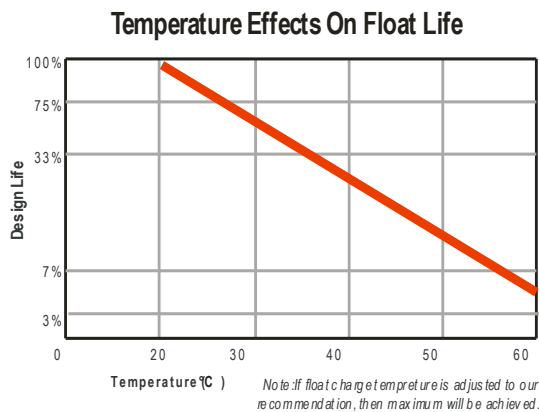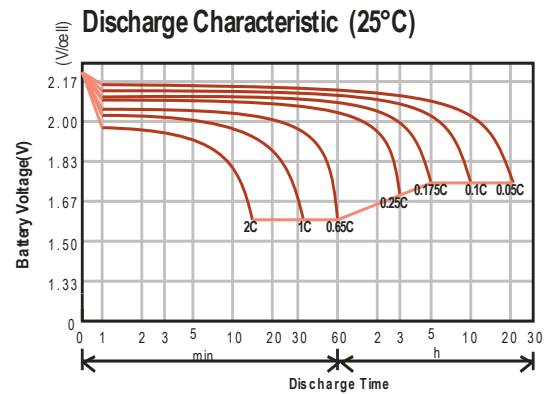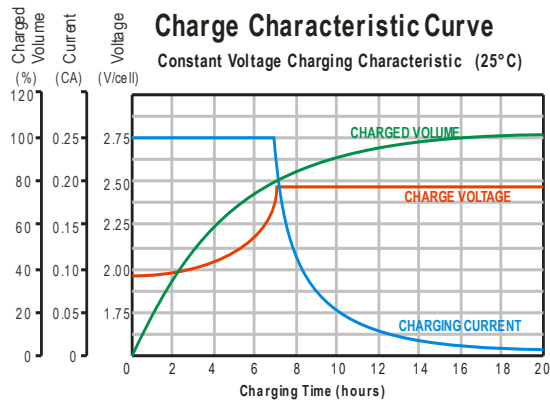

Subject to revision without notice. Please contact our sales representatives for latest version.

Web: www.genergybattery.com | Email: sales@genergybattery.com

Version NO.20181030

Page 2 of 2